

*Enabling  
Our  
Customers'  
Success*

# COPPER MAGNET WIRE

## Product Data Sheet



### CW DPG Class 155°C Copper

---

NEMA MW 46-C

#### DESCRIPTION

CW DPG magnet wire is a double layer of polyester and glass fibers applied to opposite directions over the conductor.

This combination results in an insulation system that provides excellent abrasion resistance in fraying for more severe winding applications.

#### APPLICATIONS


- AC Motors
- Generators
- DC Motors

#### FEATURES & BENEFITS

- Excellent mechanical properties
- 155°C continuous operating temperature
- Resilient abrasion resistant surface
- Excellent toughness
- Superb windability

#### AVAILABILITY

CW DPG is available on copper conductors in various builds and over CW 200 enamel in either a double layer (DPG) or a single layer (SPG). Varnish available.

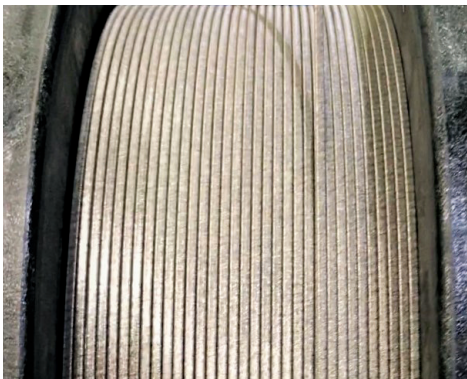

Please consult the Craig Wire service team for more detailed information.

770-920-2222 or go to  
[www.craigwire.com](http://www.craigwire.com)

Craig Wire Products  
1055 Shadix Industrial Way  
Douglasville, GA 30134  
770-920-2222